



**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE HYDIS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE HYDIS AND MUST BE RETURNED TO BOE HYDIS UPON ITS REQUEST.

**TITLE: HT190E01-100**  
**Preliminary Product Specification**

P.0

**BOE HYDIS TECHNOLOGY CO.,LTD.**

<b>SPEC. NUMBER</b>	<b>PRODUCT GROUP</b>	<b>REV.</b>	<b>ISSUE DATE</b>	<b>PAGE</b>
	TFT-LCD PRODUCT	P0	2005.01	1 OF 27



**PRODUCT GROUP**

**REV.**

**ISSUE DATE**

TFT-LCD PRODUCT

P0

2005. 01. 10

**REVISION HISTORY**

REV.	ECN NO.	DESCRIPTION OF CHANGES	DATE	PREPARED
0		Initial Release	05.02.25	Winfred Chang

<b>SPEC. NUMBER</b>	<b>SPEC. TITLE</b> HT190E01-100 Product Specification	<b>PAGE</b> 2 OF 27
---------------------	--	------------------------




**Contents**

No.	Item	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	8
5.0	Interface Connection	10
6.0	Signal Timing Specifications	12
7.0	Signal Timing Waveforms of interface signal	14
8.0	Input Signals, Display Colors & Gray Scale of Colors	15
9.0	Power Sequence	16
10.0	Mechanical Characteristics	17
11.0	Reliability Test	18
12.0	Handling & Cautions	19
13.0	Product Serial Number	20
14.0	Packing	22
15.0	Appendix	24

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HT190E01-100 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 19.0 inch diagonally measured active area with SXGA resolutions (1280 horizontal by 1024 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16,194,227 colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

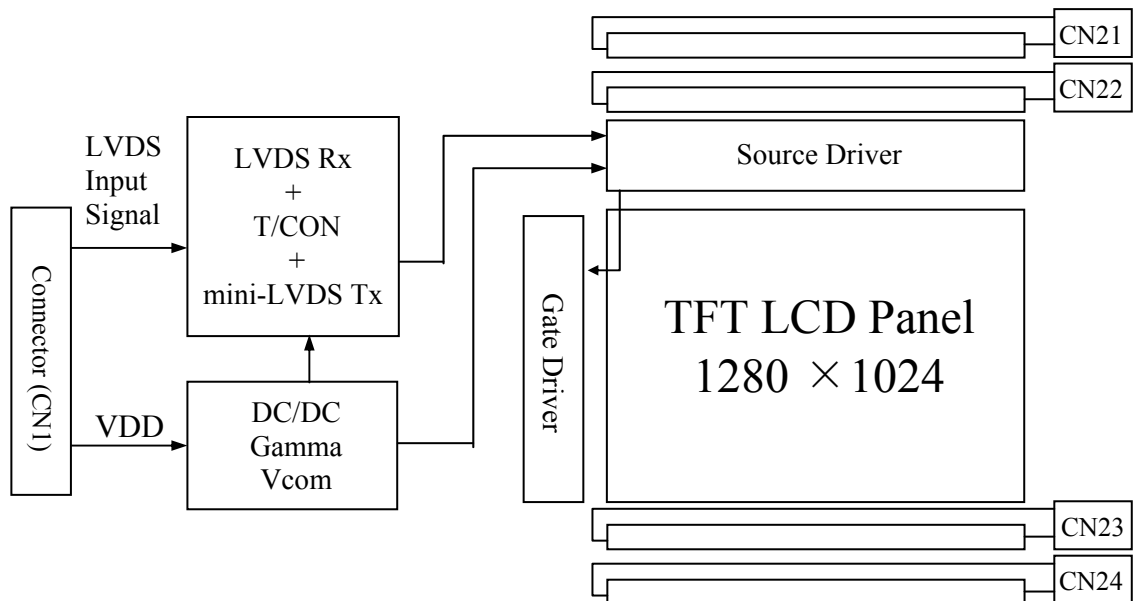

### 1.2 Features

- LVDS Interface with 2 pixel / clock
- High-speed response
- Low power consumption
- 6-bit (FRC) color depth, display 16,194,227 colors
- Incorporated edge type back-light (Four lamps)
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) & H-Sync & V-Sync mode
- RoHS Compliant

### 1.3 Applications

- Desktop Type of PC & Workstation Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controller



**PRODUCT GROUP**

**REV.**

**ISSUE DATE**

TFT-LCD PRODUCT

P0

2005.02.25

1.4 General Specifications

The followings are general specifications at the model HT190E01-100

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	376.32(H) * 301.06(V)	mm	
Number of pixels	1280(H) × 1024(V)	pixels	
Pixel pitch	0.294(H) × 0.294(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16,194,227	colors	
Display mode	Normally White		
Dimensional outline	396.0(H) × 324.0(V) × 16.5(D) typ.	mm	
Weight	2150 max.	gram	
Back-light	Top/Bottom edge side 4-CCFL type		

**2.0 ABSOLUTE MAXIMUM RATINGS**

**SPEC. NUMBER**

**SPEC. TITLE**

**PAGE**

HT190E01-100 Product Specification

5 OF 27

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

&lt;Table 2. Absolute Maximum Ratings&gt;


[VSS = GND =0V]

Parameter	Symbol	Min	Max	Unit	Remarks
Power Input Voltage	$V_{DD}$	VSS-0.5	6.5	V	Ta = 25°C
Logic Input Voltage	$V_{IN}$	VSS-0.3	$V_{DD}+0.3$	V	
Back-light Lamp Current	$I_{BL}$	3	8	mA	
Back-light lamp Frequency	$F_L$	30	(80)	KHz	
Operating Temperature	$T_{OP}$	0	+50	°C	1)
Storage Temperature	$T_{ST}$	-20	+60	°C	1)

Notes :

1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C max. and no condensation of water.

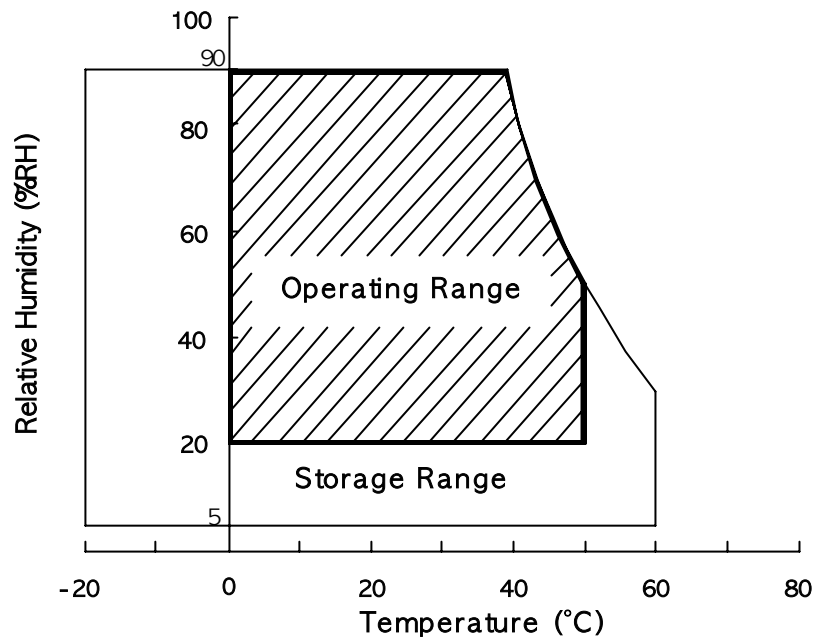

### 3.0 ELECTRICAL SPECIFICATIONS

&lt; Table 3. Electrical specifications &gt;

[Ta = 25 ± 2°C ]

Parameter		Min	Typ	Max	Unit	Remarks	
Power Supply Voltage	V <sub>DD</sub>	4.5	5.0	5.5	V	Note1	
Power Supply Current	I <sub>DD</sub>	-	750	1000	mA		
Permissible Input Ripple Voltage	V <sub>RF</sub>			100	mV	V <sub>DD</sub> = 5.0V	
High Level Differential Input Threshold Voltage	V <sub>IH</sub>		-	+100	mV	V <sub>cm</sub> = 1.2V typ.	
Low Level Differential Input Threshold Voltage	V <sub>IL</sub>	-100	-		mV		
Back-light Lamp Voltage	V <sub>BL</sub>	610	620	770	V <sub>rms</sub>		
Back-light Lamp Current	I <sub>BL</sub>	3.0	7.5	8.0	mA <sub>rms</sub>		
Back-light Lamp operating Frequency	F <sub>L</sub>	30	-	70	KHz	Note 2	
Lamp Start Voltage				1400	V <sub>rms</sub>	25°C , Note 3	
				1700	V <sub>rms</sub>	0°C , Note 3	
Lamp Life		50000			hrs	I <sub>BL</sub> = 8.0 mA	
Power Consumption		P <sub>D</sub>	-	3.75	5.0	W	
		P <sub>BL</sub>		18.6	-	W	I <sub>BL</sub> = 7.5mA, Note 4
		P <sub>total</sub>		22.1	22.83	W	

## Notes:

- The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for V<sub>DD</sub> = 5.0V, Frame rate= 75Hz and Clock frequency = 67.5MHz. Test Pattern of power supply current
  - Typ : Color Bar
  - Max : Dot pattern
- The lamp frequency should be selected as different as possible from the horizontal synchronous frequency and its harmonics to avoid interference, which may cause line flow on the display
- The voltage above this value should be applied to the lamps for more than 1 second to start-up. Otherwise the lamps may not be turned on.
- Calculated value for reference (V<sub>BL</sub> × I<sub>BL</sub>) × 4 excluding inverter loss.



**PRODUCT GROUP**

**REV.**

**ISSUE DATE**

TFT-LCD PRODUCT

P0

2005.02.25

**4.0 OPTICAL SPECIFICATIONS**

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\phi$  equal to  $0^\circ$ . We refer to  $\theta_{\phi=0}$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta_{\phi=90}$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta_{\phi=180}$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta_{\phi=270}$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\phi$ , the center of the measuring spot on the display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 5.0V +/- 10% at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

[VDD=5.0V, Frame rate=60Hz, Clock=54MHz,  $I_{BL} = 7.5\text{mA}$ ,  $T_a = 25 \pm 2^\circ\text{C}$ ]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	$\theta_3$	CR > 10	65	75	-	Deg	Note 1
		$\theta_9$		65	75	-	Deg	
	Vertical	$\theta_{12}$		65	75	-	Deg	
		$\theta_6$		50	60	-	Deg	
Luminance contrast ratio		CR	$\theta = 0^\circ$ (Center) Normal Viewing Angle	550	700	-		Note 2
Luminance of white		$Y_w$		250	300	-	$\text{cd/m}^2$	Note 3
White luminance uniformity		$\Delta Y$		75	80		%	Note 4
Reproduction of color	White	$W_x$		0.310	0.313	0.316		Note 5
		$W_y$		0.326	0.329	0.332		
	Red	$R_x$			TBD			
		$R_y$			TBD			
	Green	$G_x$		TBD				
		$G_y$		TBD				
Blue	$B_x$		TBD					
	$B_y$		TBD					
Response time		$T_r$		8	12		msec	Note 6
		$T_d$						
Cross talk		CT		-	-	2.0	%	Note 7

Note:

**SPEC. NUMBER**

**SPEC. TITLE**

**PAGE**

HT190E01-100 Product Specification

8 OF 27





**PRODUCT GROUP**

**REV.**

**ISSUE DATE**

TFT-LCD PRODUCT

P0

2005.02.25

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of  $\theta= 0^\circ$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y = ( \text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points} ) * 100$  (See FIGURE 2 shown in Appendix).
5. The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. The electro-optical response time measurements shall be made as FIGURE 3 shown in Appendix by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td, and 90% to 10% is Tr.
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).

**5.0 INTERFACE CONNECTION**

5.1 Electrical Interface Connection

**SPEC. NUMBER**

**SPEC. TITLE**

**PAGE**

HT190E01-100 Product Specification

9 OF 27



京东方  
BOE

**PRODUCT GROUP**

**REV.**

**ISSUE DATE**

TFT-LCD PRODUCT

P0

2005.02.25

- CN11: Module Side Connector : JAE FI-XB30SSL-HF16 or Equivalent  
User Side Connector : JAE FI-X30H or equivalent

Pin No	Symbol	Function	Remark
1	RXO0-	LVDS ODD 0 – SIGNAL	
2	RXO0+	LVDS ODD 0 + SIGNAL	
3	RXO1-	LVDS ODD 1 – SIGNAL	
4	RXO1+	LVDS ODD 1 + SIGNAL	
5	RXO2-	LVDS ODD 2 – SIGNAL	
6	RXO2+	LVDS ODD 2 + SIGNAL	
7	GND	GROUND	
8	RXOCLK-	LVDS ODD CLOCK – SIGNAL	
9	RXOCLK+	LVDS ODD CLCOK + SIGNAL	
10	RXO3-	LVDS ODD 3 – SIGNAL	
11	RXO3+	LVDS ODD 3 + SIGNAL	
12	RXE0-	LVDS EVEN 0 – SIGNAL	
13	RXE0+	LVDS EVEN 0 + SIGNAL	
14	GND	GROUND	
15	RXE1-	LVDS EVEN 1 – SIGNAL	
16	RXE1+	LVDS EVEN 1 + SIGNAL	
17	GND	GROUND	
18	RXE2-	LVDS EVEN 2 – SIGNAL	
19	RXE2+	LVDS EVEN 2 + SIGNAL	
20	RXECLK-	LVDS EVEN CLOCK – SIGNAL	
21	RXECLK+	LVDS EVEN CLOCK + SIGNAL	
22	RXE3-	LVDS EVEN 3 – SIGNAL	
23	RXE3+	LVDS EVEN 3 + SIGNAL	
24	GND	GROUND	
25	NC	NO CONECTION	
26	DE	NO CONECTION	
27	NC	NO CONECTION	
28	VDD	POWER SUPPLY (+5.0V)	
29	VDD		
30	VDD		

5.2 LVDS Interface (Tx : THC63LVDF83A or Equivalent)

	Input signal	Transmitter		Interface		FI-XB30SSL-HF16	Remark
		Pin No	Pin No	System (Tx)	TFT-LCD (Rx)	Pin No.	

**SPEC. NUMBER**

**SPEC. TITLE**

**PAGE**

HT190E01-100 Product Specification

10 OF 27



京东方  
BOE

PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

P0

2005.02.25

O D D L V D S	OR0	51	48	OUT0-	RXO0-	1	
	OR1	52					
	OR2	54	47	OUT0+	RXO0+	2	
	OR3	55					
	OR4	56	3	OG0	4		
	OR5	3					
	OG1	6	7	OG2	11	3	
	OG2	7					
	OG3	11	46	OUT1-	RXO1-	4	
	OG4	12					
	OG5	14	45	OUT1+	RXO1+	5	
	OB0	15					
	OB1	19	22	OUT2-	RXO2-	6	
	OB2	20					
	OB3	22	42	OUT2+	RXO2+	8	
	OB4	23					
	OB5	24	41	CLKOUT-	RXO CLK-	9	
	HSYNC	27					
	VSYNC	28	40	CLKOUT+	RXO CLK+	10	
	DE	30					
	MCLK	31	39	OUT3+	RXO3-	11	
	OR6	50					
	OR7	2	38	OUT3-	RXO3+	12	
	OG6	8					
	OG7	10	37	OUT0-	RXE0-	13	
OB6	16						
OB7	18	25	OUT0+	RXE0+	15		
RSVD	25						
E V E N L V D S	ER0	51	48	OUT1-	RXE1-	16	
	ER1	52					
	ER2	54	46	OUT1+	RXE1+	18	
	ER3	55					
	ER4	56	45	OUT2-	RXE2-	19	
	ER5	3					
	EG0	4	6	OUT2+	RXE2+	20	
	EG1	6					
	EG2	7	11	CLKOUT-	RXE CLK-	21	
	EG3	11					
	EG4	12	46	CLKOUT+	RXE CLK+	22	
	EG5	14					
	EB0	15	42	OUT3+	RXE3-	23	
	EB1	19					
	EB2	20	41	OUT3-	RXE3+	22	
	EB3	22					
	EB4	23	40				
	EB5	24					
	HSYNC	27	39				
	VSYNC	28					
	DE	30	38				
	MCLK	31					
	ER6	50	37				
	ER7	2					
	EG6	8					
EG7	10						
EB6	16						
EB7	18						
RSVD	25						

5.3 Data Input Format

ODD EVEN

(1,1) (2,1)

(1279,1) (1280,1)

SPEC. NUMBER

SPEC. TITLE

PAGE

HT190E01-100 Product Specification

11 OF 27



京东方  
BOE

PRODUCT GROUP


REV.

ISSUE DATE

TFT-LCD PRODUCT

P0

2005.02.25

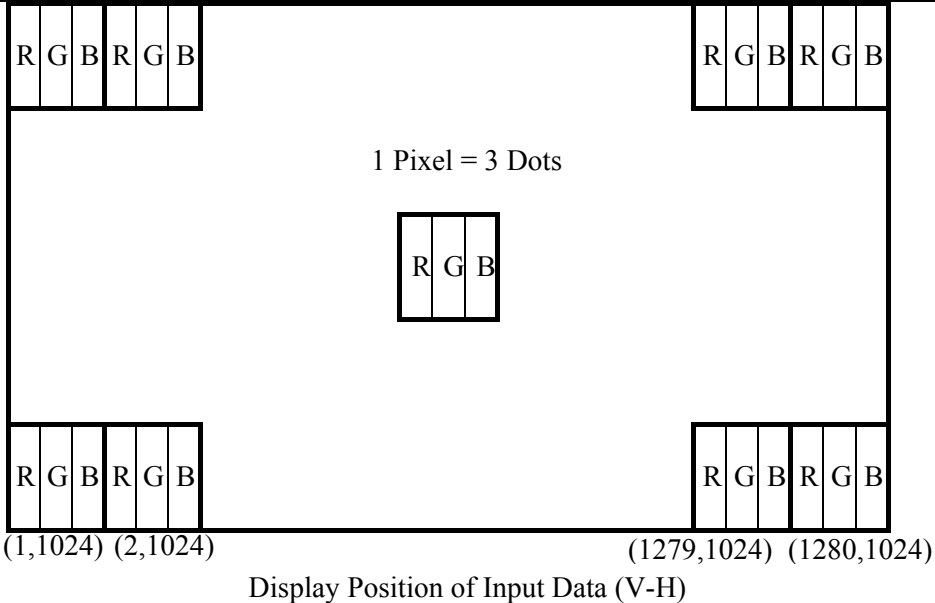

#### 5.4 Back-light Interface Connection

- CN21, 22, 23, 24: Module side connector : 35001HS-02L(YeonHo) or Equivalent  
User side connector : 35001WR-20L(YeonHo) or equivalent

Pin No	INPUT	Color	Function
1	HOT	Pink & Blue	High voltage
2	COLD	Black & White	Ground

### 6.0 SIGNAL TIMING SPECIFICATIONS

#### 6.1 The HT17E13-100 is operated by the DE & H-Sync & V-Sync mode (LVDS Transmitter Input)

Item	Symbols	Min	Typ	Max	Unit	
Clock	Frequency	1/Tc	40	54	68	MHz
	High Time	Tch	5	-	-	ns
	Low Time	Tcl	5	-	-	ns
Data	Setup Time	Tds	4	-	-	ns
	Hold Time	Tdh	4	-	-	ns
Data Enable Setup Time	Tes	4	-	-	ns	
Frame Period	Tv	1032	1066	1536	lines	
		13.33	16.67	-	msec	
Vertical Display Period	Tvd	-	1024	-	lines	
One Line Scanning Period	Th	672	844	1022	clocks	
Horizontal Display Period	Thd	640	640	640	clocks	

#### 6.2 LVDS Rx interface timing parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 4.

SPEC. NUMBER

SPEC. TITLE


PAGE

HT190E01-100 Product Specification


12 OF 27

&lt; Table 4. LVDS Rx Interface Timing Specification &gt;


Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	14.7	18.5	-	nsec	
CLK Difference	tCdiff	-tRCIP*(3/7)	0	+tRCIP*(3/7)	nsec	
Input Data 0	tRIP1	-0.4	0	+0.4	nsec	
Input Data 1	tRIP0	1*tRCIP/7-0.4	1*tRCIP/7	1*tRCIP/7+0.4	nsec	
Input Data 2	tRIP6	2*tRCIP/7-0.4	2*tRCIP/7	2*tRCIP/7+0.4	nsec	
Input Data 3	tRIP5	3*tRCIP/7-0.4	3*tRCIP/7	3*tRCIP/7+0.4	nsec	
Input Data 4	tRIP4	4*tRCIP/7-0.4	4*tRCIP/7	4*tRCIP/7+0.4	nsec	
Input Data 5	tRIP3	5*tRCIP/7-0.4	5*tRCIP/7	5*tRCIP/7+0.4	nsec	
Input Data 6	tRIP2	6*tRCIP/7-0.4	6*tRCIP/7	6*tRCIP/7+0.4	nsec	

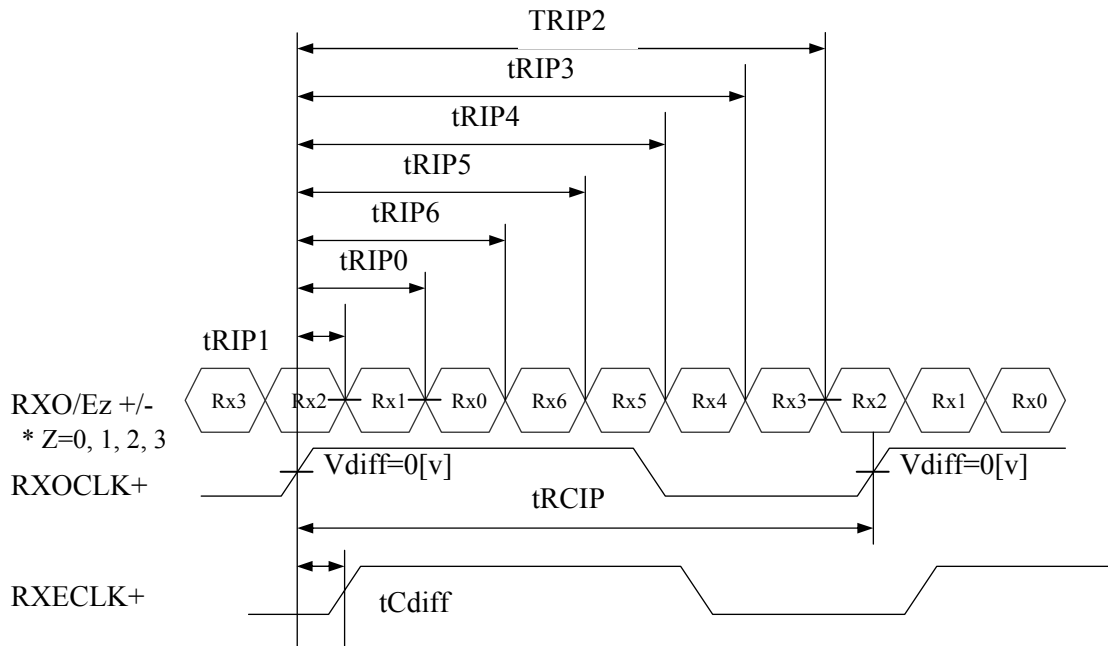



$$* V_{diff} = (RXO/Ez+) - (RXO/Ez-), \dots, (RXO/ECLK+) - (RXO/ECLK-)$$

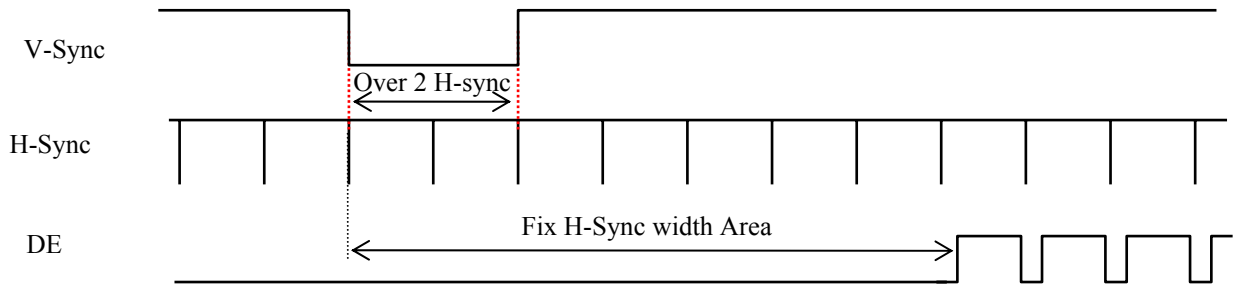**7.0 SIGNAL TIMING WAVEFORMS OF INTERFACE SIGNAL**
**7.1 Sync Timing Waveforms**


- 1) Need over 2 H-Sync during V-Sync Low Period (Recommend : over 3 H-Sync)
- 2) Fix H-Sync width form V-Sync falling edge to first DE rising edge

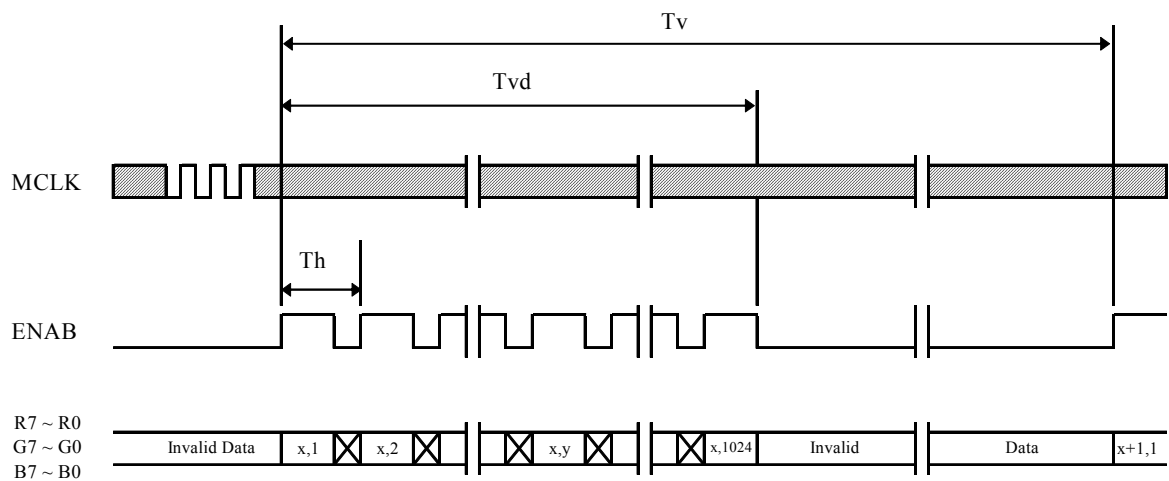**7.2 Vertical Timing Waveforms**


### 7.3 Horizontal Timing Waveforms

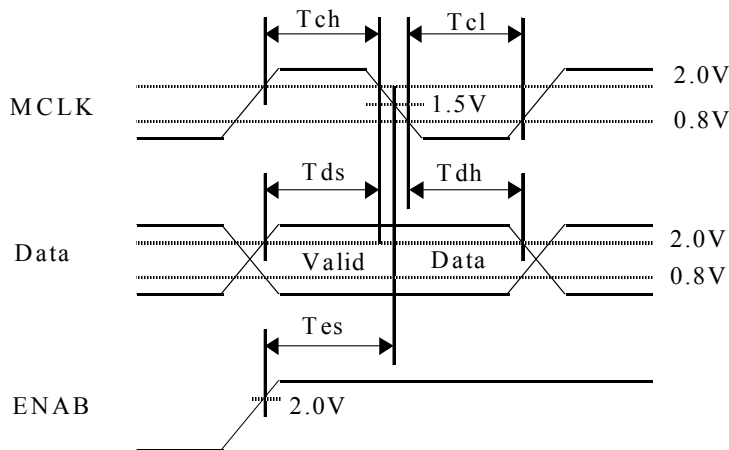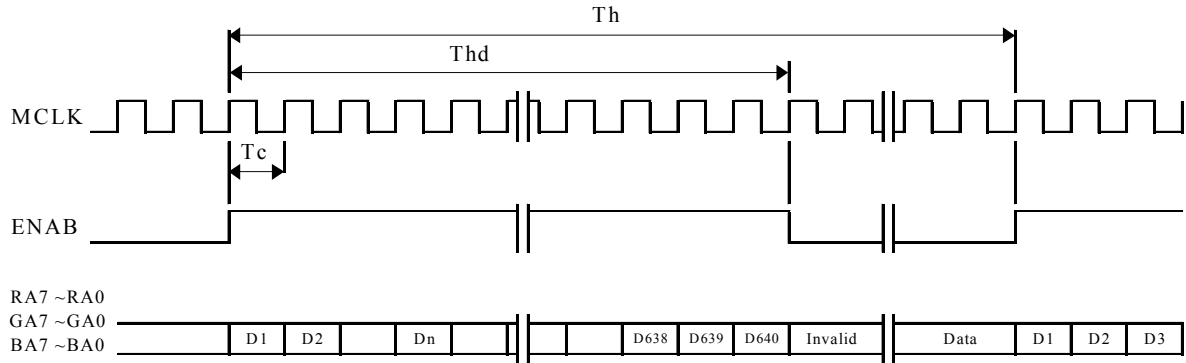



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

P0

2005.02.25

8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Colors & Gray Scale		Red data								Green data								Blue data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0		
▽	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0			
Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0			
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	
▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0		
Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1		
Gray Scale Of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	
▽	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	0		
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		

SPEC. NUMBER

SPEC. TITLE

PAGE


HT190E01-100 Product Specification

16 OF 27



## 9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as shown in below

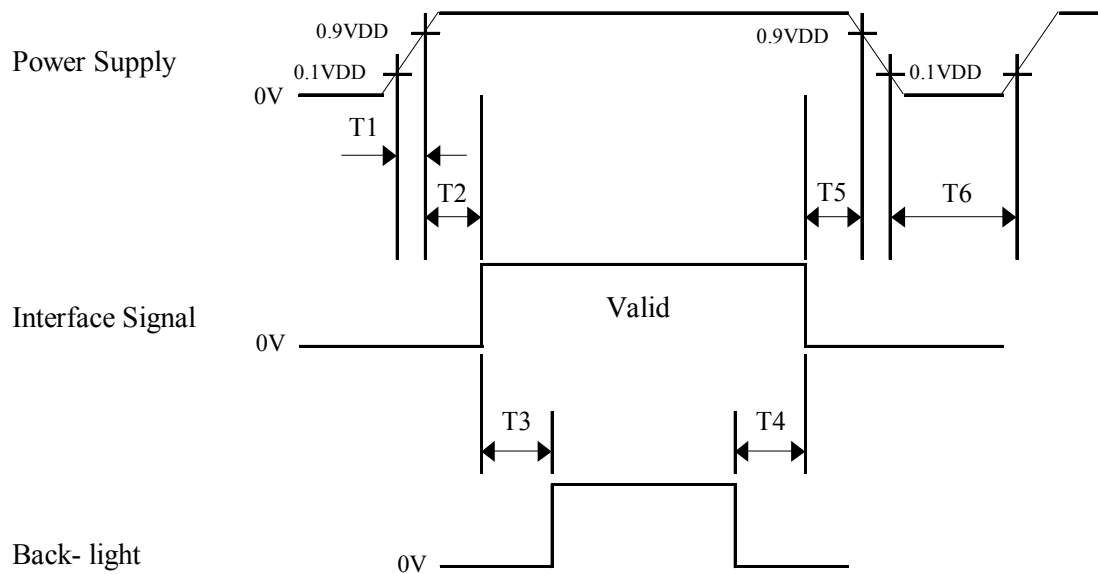

- $0 < T1 \leq 10 \text{ ms}$
- $0 < T2 \leq 50 \text{ ms}$
- $200 \text{ ms} \leq T3$
- $100 \text{ ms} \leq T4$
- $0 < T5 \leq 50 \text{ ms}$
- $1 \text{ sec} \leq T6$

### Notes:

1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

## 10.0 MECHANICAL CHARACTERISTICS

### 10.1 Dimensional Requirements

FIGURE 6 shown in appendix shows mechanical outlines for the model HT190E01-100. Other parameters are shown in Table 5.

<Table 5. Dimensional Parameters>

Parameter	Specification	Unit
Dimensional outline		
Horizontal	396.0 ±0.5	mm
Vertical	324.0 ±0.5	
Thickness	16.5 ±0.5	
Weight	2150 max.	gram
Active area	376.32 (H) × 301.06(V)	mm
Pixel pitch	0.294(H) × 0.294(V)	mm
Number of pixels	1280(H) × 1024(V) (1 pixel = R + G + B dot)	pixels
Back-light	Top / Bottom edge side 4-CCFL type	

### 10.2 Mounting

See FIGURE 5 shown in appendix

### 10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

### 10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50[cm] from the screen with an overhead light level of 350[lux].

The manufacture shall furnish limit samples of the panel showing the lightest leakage acceptable.

## 11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 6. Reliability Test Parameters>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80 %RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (30 min), 100 cycle
7	Vibration test (non-operating)	Frequency : 10 ~ 300 Hz, Sweep rate 30min Gravity/AMP : 1.5G Period : ±X, ±Y, ±Z 30min
8	Shock test (non-operating)	Gravity : 50G Pulse width : 11ms, sine wave ±X, ±Y, ±Z Once for each direction
9	Electrostatic discharge test	Air : 150 pF, 330Ω, 15KV Contact : 150 pF, 330Ω, 8KV



京东方  
BOE

PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

P0

2005.02.25

## 12.0 HANDLING & CAUTIONS

### 12.1 Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

### 12.2 Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back-light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry-cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### 12.3 Cautions for the operation

- When the module is operating, do not lose LVDS signals. If any one of these signals were lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If the wrong sequences were applied, the module would be damaged.

### 12.4 Cautions for the atmosphere

- Dewdrop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended.

### 12.5 Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at aging time.
- Applying fixed pattern for a long time may cause image sticking.

### 12.6 Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc, please pack the module not to be broken. We recommend on using the original shipping packages.

## 13.0 PRODUCT SERIAL NUMBER

SPEC. NUMBER

SPEC. TITLE

PAGE

HT190E01-100 Product Specification

20 OF 27



PRODUCT GROUP

REV.

ISSUE DATE


TFT-LCD PRODUCT

P0

2005.02.25



HT190E01-100



MADE IN CHINA

XXXXXXXXXXXXXXXXXXXX

1	2	3	4	5	6	7
X X	X	X	X X	X	X X X X	X X X X X X

Type

No 1. Control

No 2. Rank

No 3. Line Classification(BOE HYDIS : H, LCM : L, BOE OT : A/B/C)

No 4. Year(2001 : 01, 2002 : 02, ...)

No 5. Month(1, 2, 3, ...,9 X, Y, Z)

No 6. FG Code

No 7. Serial No.

SPEC. NUMBER

SPEC. TITLE

PAGE


HT190E01-100 Product Specification

21 OF 27


## 14.0 Packing

### 14.1 Packing Order

Put Pad into the box.

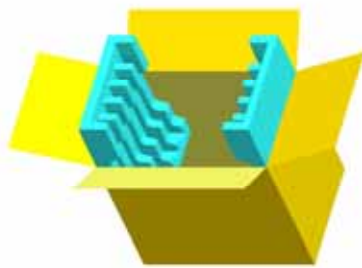


Put silica gels in the box.




After sealing the box, attach Packing Label on the attach position



Place a cover on the top of the box.

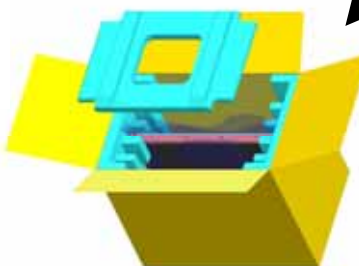

As shown in the figure, place the Modules bundled by shielding bag in the box.

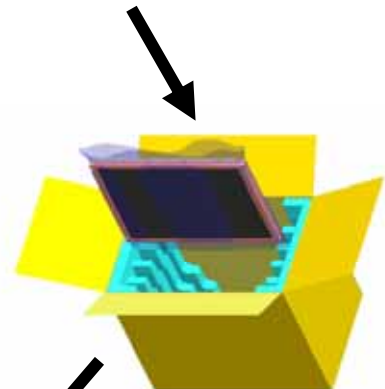



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

P0


2005.02.25

14.2 Packing Note

- Box Dimension: 346mm(W)X 526mm(D)X 448(H)
- Package Quantity in one Box : 7pcs

14.3 Box label


- Label Size: 108 mm (L) × 56 mm (W)
- Contents
  - Model: HT190E01
  - Q`ty: Module Q`ty in one box
  - Serial No.: Box Serial No. See next page for detail description.
  - Date: Packing Date
  - FG Code: FG Code of Product

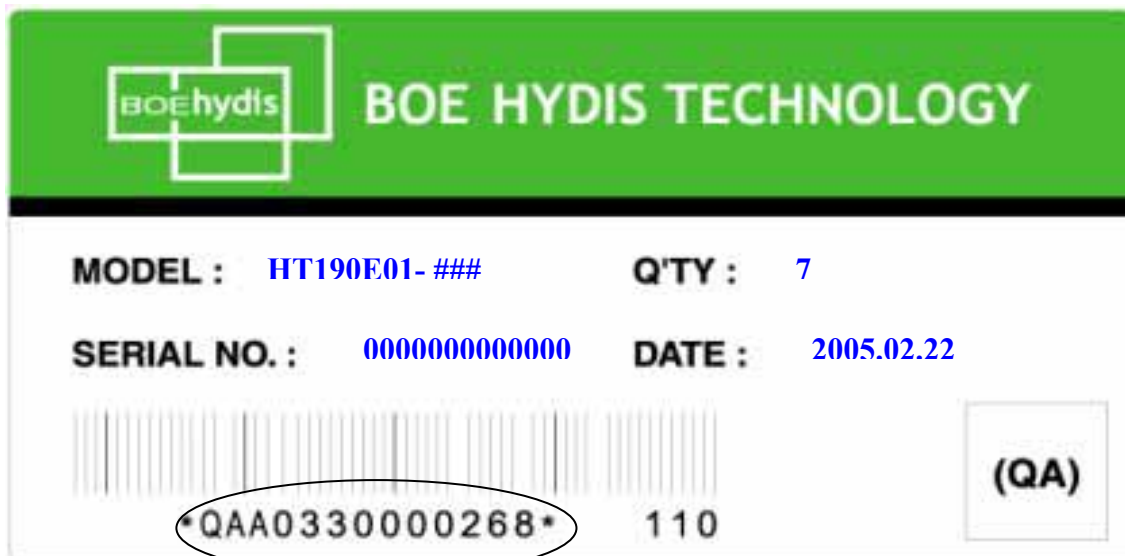

\*QAA0330000268\*



110

(QA)


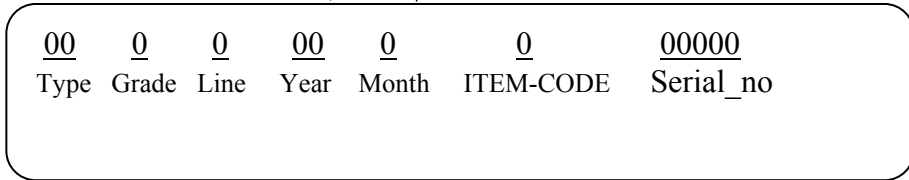


FG CODE

<b>SPEC. NUMBER</b>	<b>SPEC. TITLE</b>	<b>PAGE</b>
	HT190E01-100 Product Specification	23 OF 27

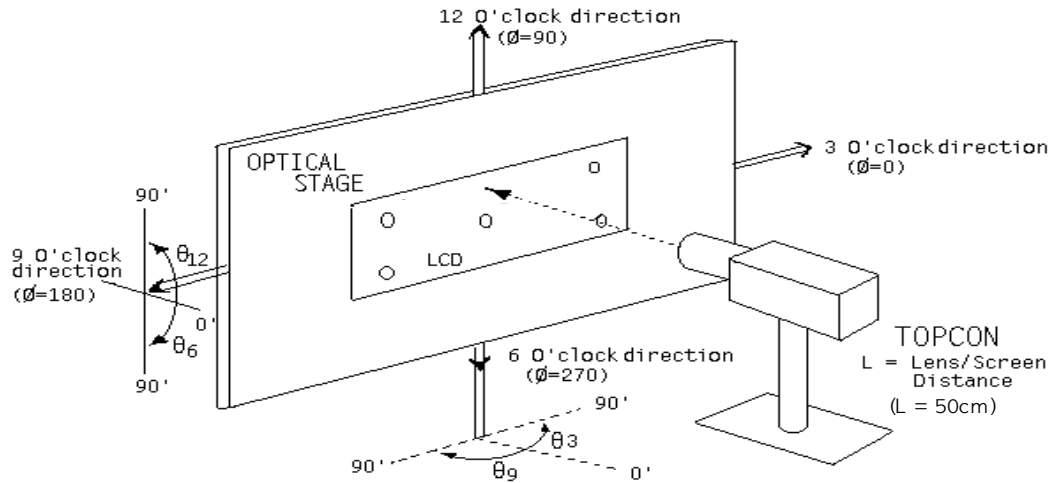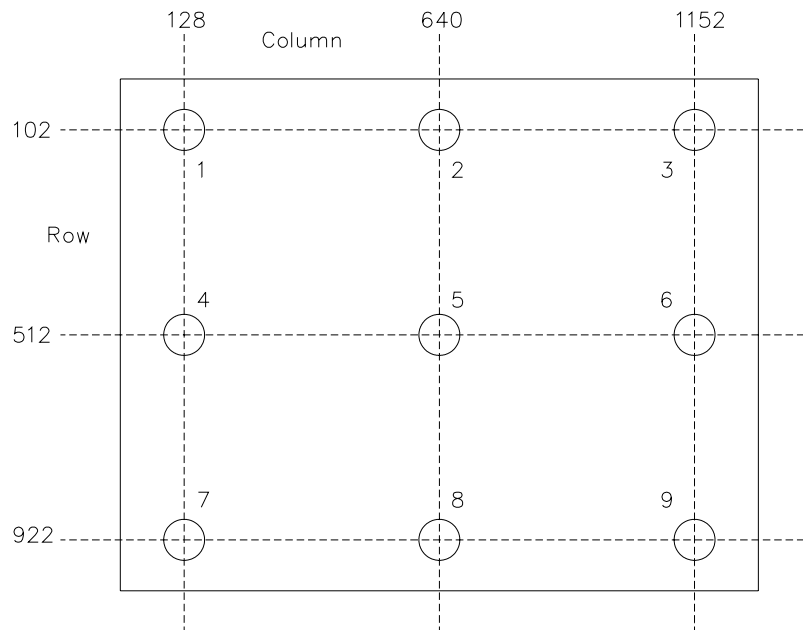**15.0 APPENDIX**
**Figure 1. Measurement Set Up**

**Figure 2. Average Luminance Measurement Locations & Uniformity Measurement Locations**

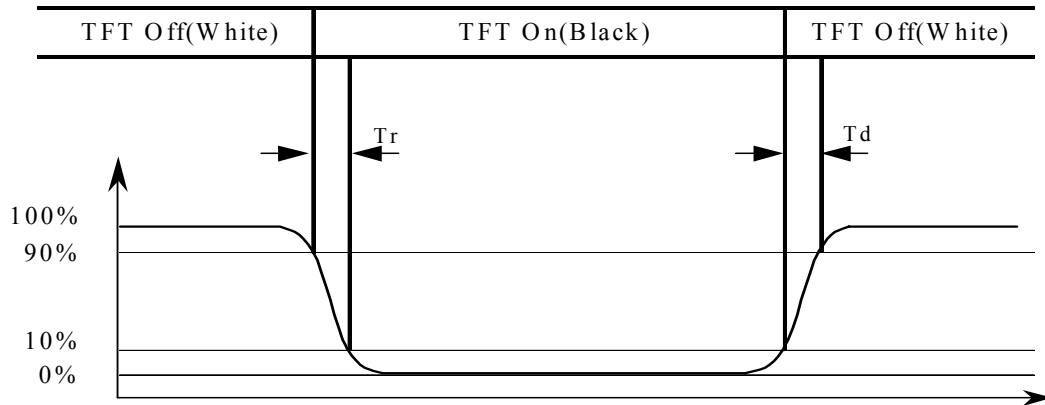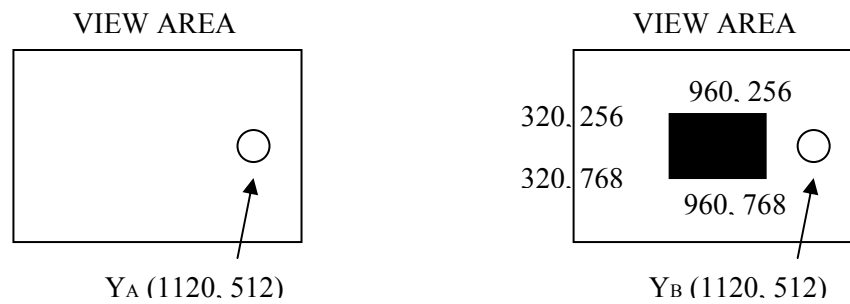


**Figure 3. Response Time Testing**

**Figure 4. Cross Modulation Test Description**


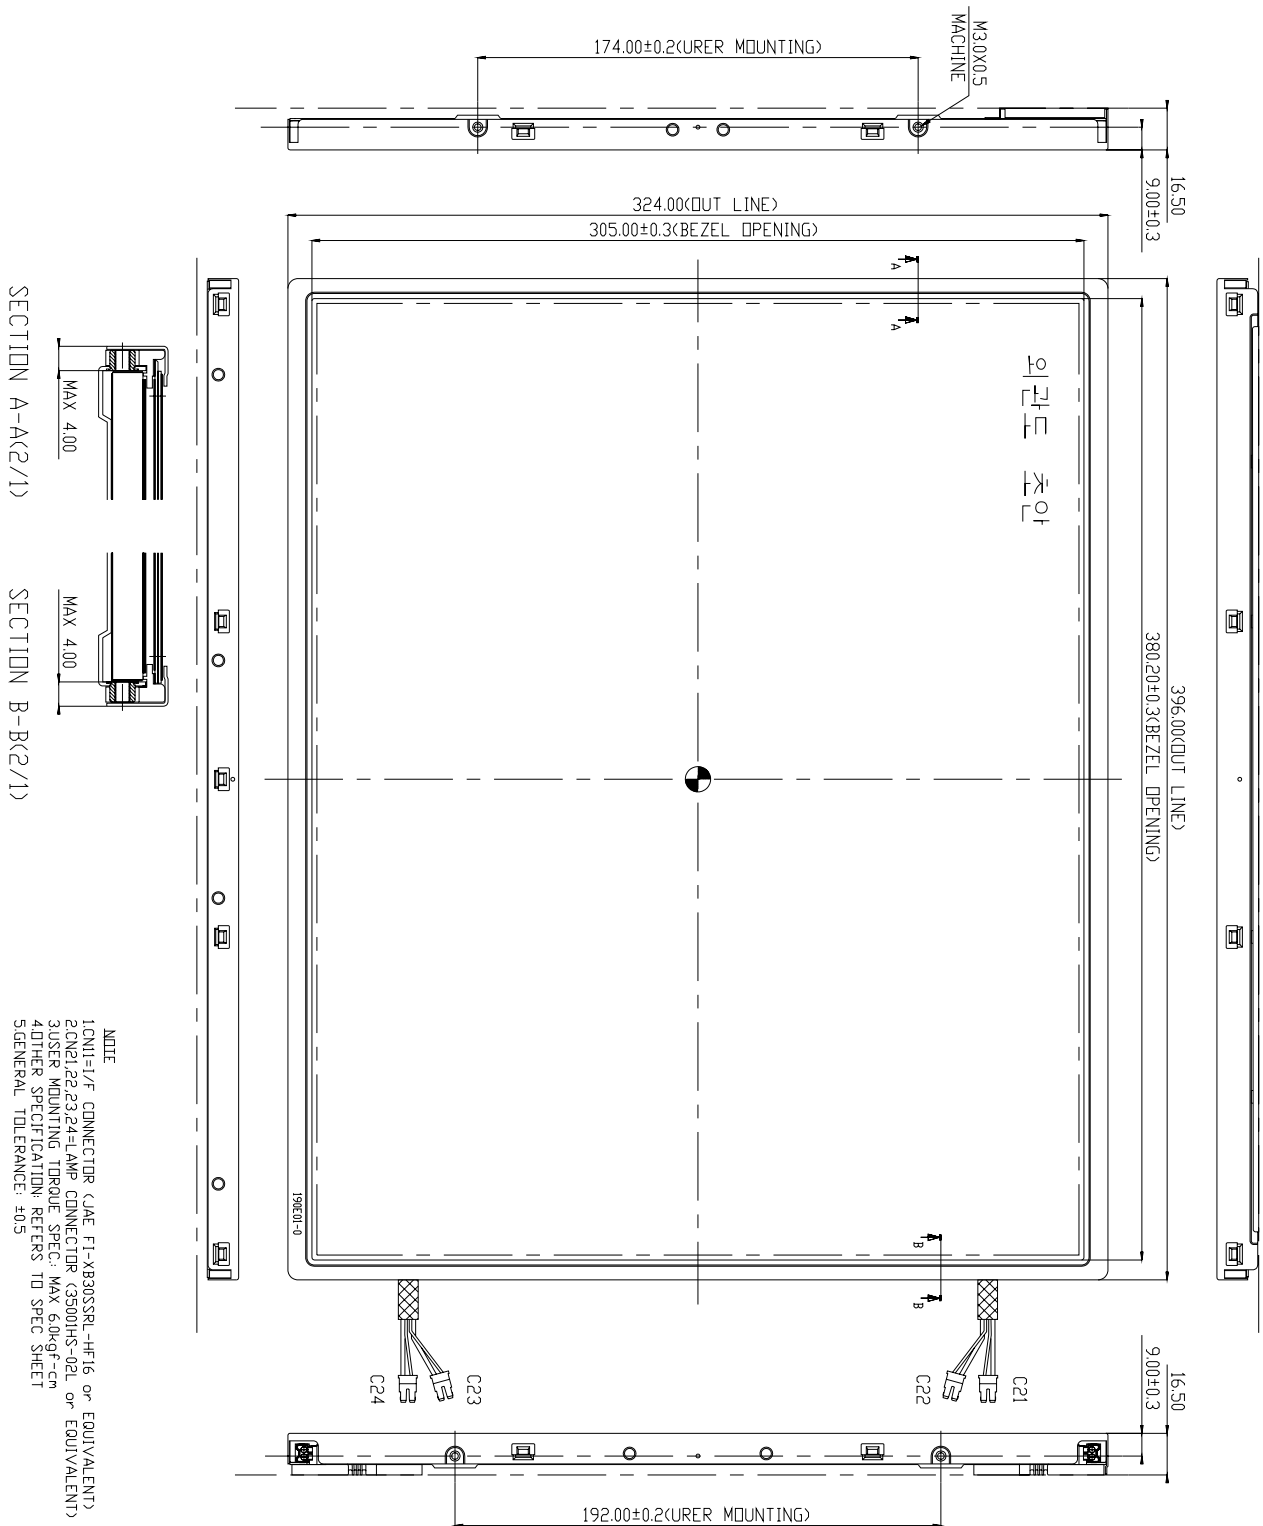
$$\text{Cross-Talk} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area ( $\text{cd}/\text{m}^2$ )

$Y_B$  = Subsequent luminance of measured area ( $\text{cd}/\text{m}^2$ )

The location measured will be exactly the same in both patterns.

**Figure 5. TFT-LCD Module Outline Dimensions (Front view)**

**SPEC. NUMBER**
**SPEC. TITLE**
**PAGE**

HT190E01-100 Product Specification

26 OF 27

**Figure 6. TFT-LCD Module Outline Dimensions (Rear view)**
